

Technical Data Sheet


PROPELLING EXCELLENCE
PROXAL[®]



UPVC Coating Aerosol

A specially developed coating for the renovation and recolouring of uPVC objects such as windows, doors and facias. It is a fast drying, coloured coating that adheres direct to uPVC giving a durable UV and weather resistant flexible finish

Code: UPVC7016 / UPVC9005 / UPVC9016

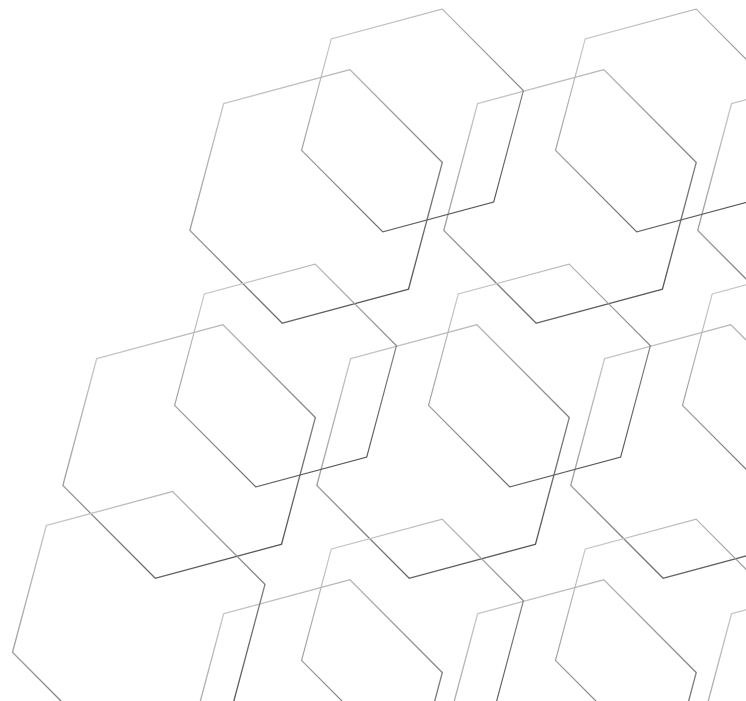

Technical Data

Technical Information

Size	400ML
Basis of binder	Special acrylic resins
Colour	Anthracite Grey - RAL 7016 - (UPVC7016); Jet Black - RAL 9005 - (UPVC9005); Traffic White - RAL 9016 - (UPVC9016)
Gloss Level	65 - 70%
Temperature resistance to	90°C
Theoretical Coverage	1m ²
VOC Directive	2004/42/B(e): Max 840g/l
VOC Content	✓ Max 625.8 g/l in the ready to use form
Storage	Store in a cool dry place in original container between +10°C & +30°C
Shelf Life	10 years when stored in the above conditions

Application Guide





Substrates




- New and old UPVC plastics

Types of Use

- UPVC Doors, Windows & Frames
- UPVC Conservatories
- UPVC & Plastic Fascia
- Plastisol Exterior Cladding
- Plastic Downpipes & Gutters
- Plastic Furniture

Application

-  Lightly abrade uPVC with grey scotchbrite or similar
-  Clean surface with a suitable degreaser
-  Areas to be sprayed must be free of grease, dust and dry
-  Carry out test spray if possible

-  Apply in cross coats
-  Touch dry time 10-15mins @20C
-  Fully cured after 7 days

Disposal

Completely emptied cans should be put in recycling skips or appropriate container. Cans which are not empty should be disposed of as special refuse.

This application and technical information is given to the best of our knowledge. The notes mentioned herein are, however, non-binding and do not exempt you from own tests to see whether the products supplied by us are suitable for your special application. The use and processing is beyond our control and therefore exclusively is the responsibility of the user.

DISCLAIMER OF LIABILITY

The information contained in this Technical Data Sheet is correct to the best of Alpha Coatings Limited trading as Capella Solutions Group's ("Capella") knowledge, however, you must satisfy yourselves that the Goods are suitable for your needs by way of your independent testing or other processes. Capella makes no warranty, representation, or guarantee regarding the information contained in the Technical Data Sheet or the suitability of its products and services for any particular purpose, nor does Capella assume liability arising out of the application or use of the Goods other than any liability which cannot be limited by law including but not limited to liability for: (a) death or personal injury caused by negligence; (b) fraud or fraudulent misrepresentation; and (c) breach of the terms implied by section 12 of the Sales of Goods Act 1979, in such circumstances Capella's total liability shall not exceed the cost of the Goods. Capella's total liability includes liability in contract, tort, negligence, breach of statutory duty, or otherwise. It is the Customer's responsibility to ensure that the guidance on the Technical Data Sheet is followed.