

# Technical Data Sheet

PROPELLING EXCELLENCE  
**PROXL**<sup>®</sup>

generation<sup>™</sup>  
**20**

## FAST SEMI-RIGID FOAM-GREY

FAST SEMI-RIGID FOAM GREY is a two components foam which has polyurethane as basis, is grey, polymerizes itself at room temperature in very few seconds.

Product Code - PROFOAM-G; PROFOAM-G200

CHEMICAL BASE	PU
REACTION TIME	5 SEC
COLOUR	GREY
DENSITY	0,125
VISCOSITY	LIQUID



**proxl.com**  
Visit our website  
for more products

## Technical Data

PROPERTIES	COMPONENT A	COMPONENT B	MIXED
Chemical base	Polyol	MDI	Polyurethane
Mixing ratio by volume	1,00	1,00	
Mixing ratio by weight	0,89	1,00	
Colour	Black	Natural	Grey
Appearance	Liquid	Liquid	Foam
Viscosity (mPa*s)	800	800	15.000
Relative density	1,04	1,20	1,12
Application temperature (°C)			+10 / +30
Gel time (10 g @ 20 °C)			5 sec
Expansion time (10 g @ 20 °C)			30 sec
Cut after			3 min
Polymerization completed (10 g @ 20 °C)			120 min
Density (kg/l)			0,125
Hardness			Semi-Rigid
Service Temperature (°C)			-36 / +90
Retention time (months)			12
Storage temperature (°C)			+20 / +30

## Surface Preparation

- The pre-treatment of thermoplastic materials like PVC, polycarbonate, polypropylene, PMMA, etc, can be made using a mixture of light ethers or with isopropanol. Avoid using solvents
- The pre-treatment of all the other surfaces can be made using acetone or trichloroethylene
- All the surfaces must be free from dust, oils and loose material.  
Cavities must be partially filled as final filling will be completed by the expansion of the material.


## Application Guide

Blending should be made through static mixer composed by a minimum of 21 elements. A lower number of components doesn't allow a complete mixing. A higher number of components would increase speed of the chemical reaction of hardening. Static mixer nozzles are designed for 1 use only.

Bi-components cartridges can be used through manual applicators or specific pneumatic tools, based on capacity and cartridge shape.

## Reaction Mechanism

The speed of the hardening reaction is influenced by the application temperature. In conditions of standard temperature (20 °C), the foam is cut after 2 minutes and reaches its maximum hardness within two hours of the extrusion.

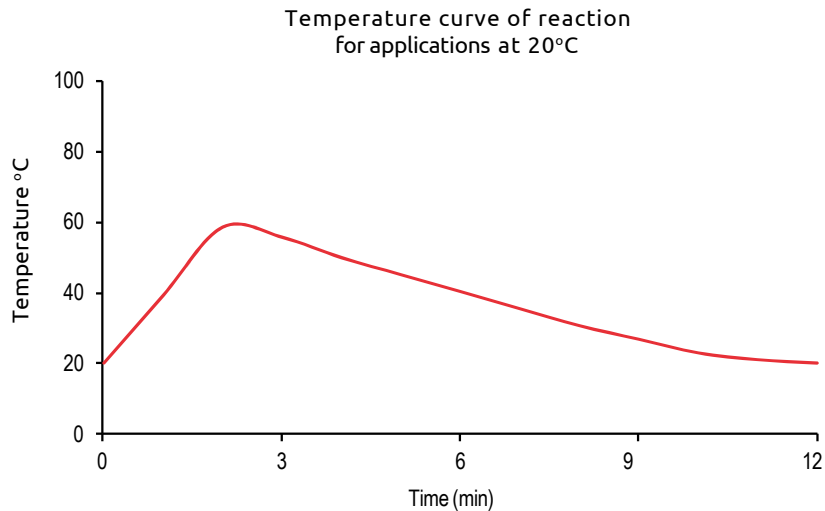

## Technical Characteristics of Cured Products

Color	Grey
Expansion Ratio	1:9
Density	125 kg/m <sup>3</sup>
Mechanical Resistance	0.2 N/mm <sup>2</sup>
Closed cell contents	> 90%
Water Absorption	2.0% vol
Thermal Resistance	0.04 W/(m*K)
Fire Resistance	self-extinguishing

The values, obtained with standard methods are exclusively provided as technical information, and not as product specification.

It will be up to the user to test the product for a specific situation.

## **PRODUCT STORAGE**

FAST SEMI-RIGID RIGID FOAM GREY has a shelf life of 12 months from the initial production as long as it is stored in a cool and dry place, between +20 °C and +30 °C.

Once opened, the cartridges will last until the expiry date (as long as the above conditions are met) leaving the last mixer used onto the cartridge.

Prior to ulterior usage, clean the top of the cartridge to eliminate possible solidified foam residuals which could obstruct the product emission.

## **PRODUCT HANDLING CAUTIONS**

These products are generally quite harmless to handle provided that certain precautions are normally taken when handling chemicals.

The uncured materials must not be allowed to come into contact with foodstuffs or food utensils, and measures should be taken to prevent the uncured materials from coming in contact with the skin, since people with particularly sensitive skin may be affected.

The wearing of impervious rubber or plastic gloves will normally be necessary; likewise the use of eye protection.

The skin should be thoroughly cleaned at the end of each working period by washing with soap and warm water. The use of solvents has to be avoided. Disposable paper should be used to dry the skin.

Adequate ventilation of the working area is recommended.

These precautions are described in greater detail in the safety data sheet for the individual products and should be referred to for further information.

### **DISCLAIMER OF LIABILITY**

The information and, in particular, the recommendations relating to the application and end-use of ProXL products, are given in good faith based on ProXL current knowledge and experience of the products when properly stored, handled and applied under normal conditions. ProXL cannot assume responsibility for the results obtained by others over whose methods we have no control. It is the user's responsibility to determine suitability for the user's purpose of any production method mentioned herein and to adopt such precautions as may be advisable for the protection of property and of persons against any hazards that may be involved in the handling and use thereof. ProXL specifically disclaims all warranties expressed or implied, including warranties of merchantability or fitness for a particular purpose, arising from sale or use of ProXL products. ProXL specifically disclaims any liability for consequential or incidental damages of any kind, including lost profits. Users should always refer to the most recent issue of the technical data sheet for the product concerned, copies of which will be supplied on request.