



# Technical Data Sheet

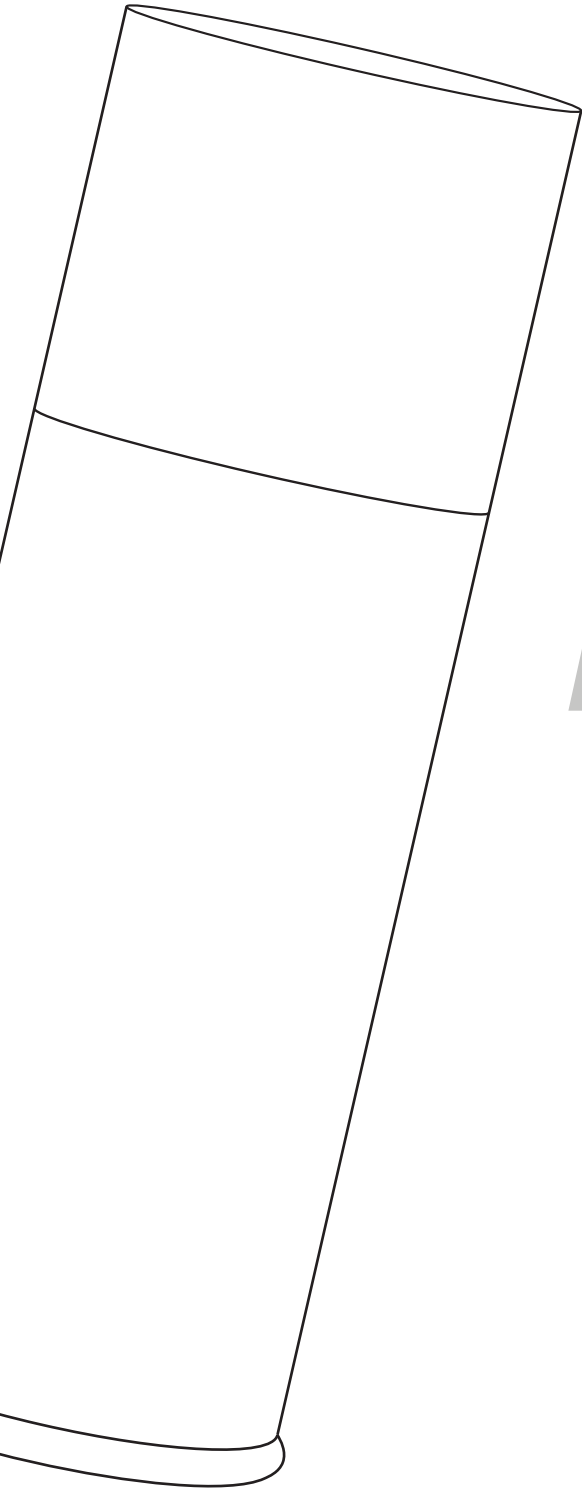

## ULTRAETCH

UltraEtch primer is an outstanding all-purpose epoxy etch primer that provides excellent adhesion and corrosion prevention on sheet steel, zinc-coated steel, aluminium and anodised aluminium. It is very fast drying with excellent flow out and can be used wet-on-wet with a super smooth finish.

Code - ULTRAETCH



**proxl.com**  
Visit our website  
for more products



## Technical Data

### Technical Information

Size	500ML
Basis of binder	Epoxy resin
Colour	Grey
Coverage	1m <sup>2</sup>
Temperature resistance	to 90°C
VOC Directive	2004/42/IB(e),(840)
VOC content	670.8 g/l
Storage stability	Store in a cool dry place in original container between -10°C & +25°C
Shelf Life	10 years if appropriate storage provided (=10°- 25°C, relative air humidity of max. 60%)









## Substrates

- Aluminium
- Bare steel
- Fibreglass
- Galvanised steel
- Old paint work
- Zinc coated steel

## Surface Preparation

- Remove all rust from metal surfaces
- Clean surface with a suitable degreaser then abrade
- Carry out test spray
- Areas to be sprayed must be free of grease, dust and dry
- For professional use only
- Wear an appropriate respirator (recommended type A2/P3)

# Application Guide

	Shake aerosol for at least two mins, after agitator ball is free
	Apply in cross coats from distance of 250mm from object
	Apply 1-2 coats
	Allow 5-10mins for flash off between coats
	Infrared for 8-10mins
	Dry to sand time 30mins at 20°C
	Sandable with P400–P500
	After use, turn aerosol upside down and empty valve

## DISPOSAL

Completely emptied cans should be put in recycling skips or appropriate container. Cans which are not empty should be disposed of as special refuse.

This application and technical information is given to the best of our knowledge. The notes mentioned herein are, however, non-binding and do not exempt you from own tests to see whether the products supplied by us are suitable for your special application. The use and processing is beyond our control and therefore exclusively is the responsibility of the user.

## ENVIRONMENTAL

ProXL is committed to use formulations without restricted or critical ingredients and to achieve the best possible performance. The caps and packagings are made of recyclable material.

### DISCLAIMER OF LIABILITY

The information contained in this Technical Data Sheet is correct to the best of Alpha Coatings Limited trading as Capella Solutions Group's ("Capella") knowledge, however, you must satisfy yourselves that the Goods are suitable for your needs by way of your independent testing or other processes. Capella makes no warranty, representation, or guarantee regarding the information contained in the Technical Data Sheet or the suitability of its products and services for any particular purpose, nor does Capella assume liability arising out of the application or use of the Goods other than any liability which cannot be limited by law including but not limited to liability for: (a) death or personal injury caused by negligence; (b) fraud or fraudulent misrepresentation; and (c) breach of the terms implied by section 12 of the Sales of Goods Act 1979, in such circumstances Capella's total liability shall not exceed the cost of the Goods. Capella's total liability includes liability in contract, tort, negligence, breach of statutory duty, or otherwise. It is the Customer's responsibility to ensure that the guidance on the Technical Data Sheet is followed.